


D SERIES FILTERPAK

Convenient & Compact!

Perfect for situations with minimal storage space, the FP-D FilterPak combines style and convenience in a compact design that allows the operator to carry it just about anywhere. This powerhouse has the ability to filter oil viscosities up to 600cSt (ISO VG 680) at 100°F within ambient temperature ranges of -15°F to 150°F. All Y2K products are 100% customizable upon request.

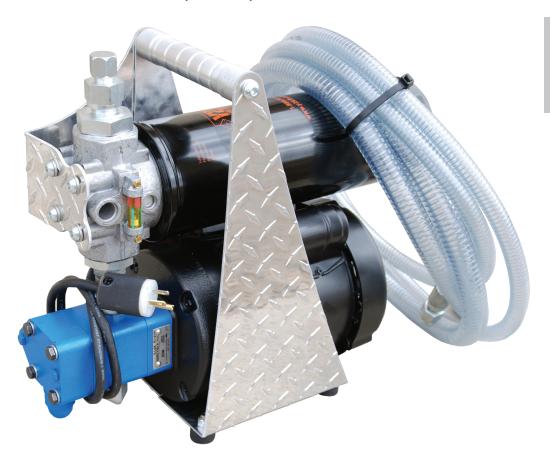

Typical Applications:

- Filtering contaminated systems
- Flushing new or repaired systems
- · Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Collecting oil samples for analysis
- Dispensing new oil





Performance:

For filtering mineral and synthetic based oils (hydraulic oils, gear oils and turbine oils). This powerhouse has the ability to filter oil viscosities up to 600cSt (ISO VG 680) at 100°F within ambient temperature ranges of -15°F to 150°F.

Standard Features:

Frame:	Heavy duty, diamond plated aluminum frame
Motor:	1/2 HP or 1HP, 115vac, 60Hz or Pneumatic
Filter Heads:	Medium pressure, cast aluminum heads
Pump:	Heavy duty, cast steel gear pump. Available in 1, 2, 5 and 10 \ensuremath{GPM}
Connections:	Various quick connect options available
Hoses:	7ft. Clear PVC, steel reinforced hose or hydraulic hose
Power Switch:	On/off toggle switch
Cord:	4ft. cord
Filter Indicators:	Slide bar indicators trigger at 50psid when elements need to be changed
Pump Relief:	Opens at 150psi
Weight:	Approx. 50lbs (will vary depending on options)
Dimensions:	Approx. 8"L x 16"W x 16"H

Replacement Elements:

Part Number	BETA Rating	Desired Cleanliness Level (ISO Code)
P1066	64(c)=2000	14/12/9 - 13/11/8
P1065	ß7(c)=2000	18/16/13 - 15/13/10
P1063	ß10(c)=1000	19/17/14 - 18/16/13
P1064	ß25(c)=2000	20/18/15 - 19/17/14
P1048WR	Water Removal	

All D Series elements measure 5" x 14".

Components:

Item Number	Description	Qty.
1	Motor	1
2	Pump	1
3	Filter Element	1
4	Filter Head	1
5	Filter Indicator	1

